

Master Link | 400T Master Link



Material: Grade 80

Safety factor: ≤ 12914000 – 400 ton, 5 times
> 12916000 – 400 ton, 4 times

Standards: Generally according to EN 1677-4

Finish: Painted



Temperature range: ≤ 12914000 – 400 ton, -4°F up to +392°F
> 12916000 – 400 ton, -40°F up to +392°F; Polar Rated

Standard certification: Certificate of Conformity
3.1 material certificate EN 10204


Temperatures

If extreme temperature situations are applicable, the following load reduction must be taken in to account:


Temperatures	
Temperature	Reduction for elevated temperatures New Working Load Limit
up to 392°F	100% of Rated Working Load Limit
392°F - 572°F	90% of Rated Working Load Limit
572°F - 752°F	75% of Rated Working Load Limit
>752°F	not allowed

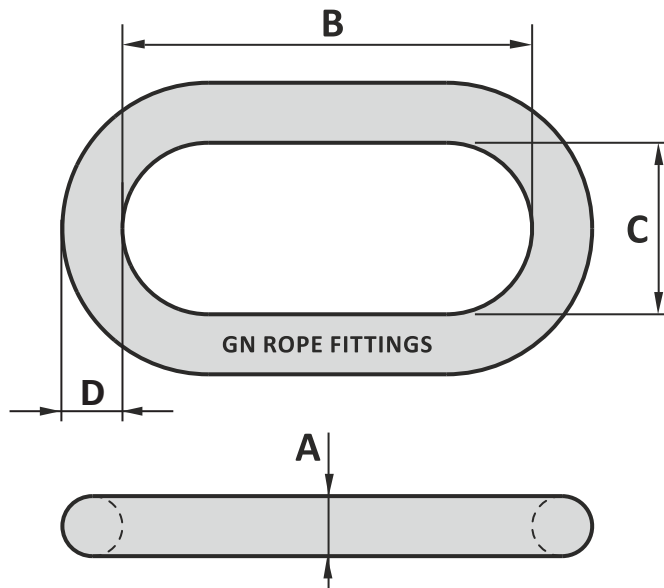


100% WLL




0°-90°
100% WLL



90°-120°
70% WLL



70% WLL

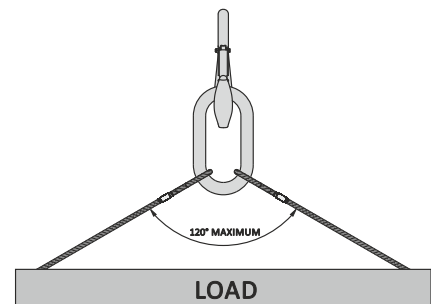

Specifications

Model	WLL (ton)	MBL (ton)	A (in)	B (in)	C (in)	D (in)	Weight (lbs)
12912510	300	1500	4 17/32	23 5/8	11 13/16	4 17/32	340
12913500	400	2000	4 17/32	27 9/16	9 27/32	4 17/32	366

Green shading reflects rental inventory.